


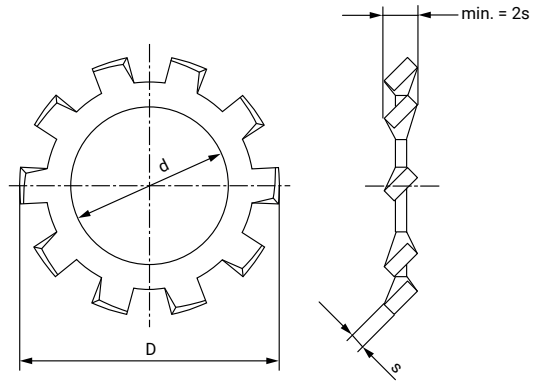

External tooth lock washers manufactured according to DIN 6797 allow the immobilization of fasteners such as bolts and screws which are subject to vibrations while maintaining uniform tightening torque, in any mechanical electrical or electronic application.

In addition to these anti-vibration properties, this washer also improves the quality of electrical circuits as each of the outer teeth forms an excellent point of contact.

The fact that Form A has teeth on the outer circumference of the washer means that there is uniform contact on the biggest possible surface area, thereby reducing the danger of loosening.

The surface of the bolt or screw should be flat and perpendicular to its vertical axis.

MATERIAL: Spring steel
C60S (C60)
FINISH: Anti-rust oil-dipped
HARDNESS: HV 350 ÷ 425 / HRC 36 ÷ 43

Ø Application mm	Part Number	d Min.	d Max.	D Min.	D Max.	S		Box Quantity	Outer Box Quantity
3,0	01040058	3,2	3,38	6,0	5,70	0,4	± 0,020	7.000	112.000
4,0	01040074	4,3	4,48	8,0	7,64	0,5	± 0,025	2.500	40.000
4,6	01041069	4,7	4,78	9,0	8,64	0,5	± 0,025	1.000	64.000
5,0	01040082	5,3	5,48	10,0	9,64	0,6	± 0,025	1.500	24.000
6,0	01040090	6,4	6,62	11,0	10,57	0,7	± 0,030	2.500	40.000
7,4	01040103	7,5	7,64	12,5	12,07	0,8	± 0,030	1.000	16.000
8,0	01040111	8,4	8,62	15,0	14,57	0,8	± 0,030	1.000	16.000
10,0	01040120	10,5	10,77	18,0	17,57	0,9	± 0,030	1.000	8.000
12,0	01040138	13,0	13,27	20,5	19,98	1,0	± 0,030	900	3.600
14,0	01040154	15,0	15,27	24,0	23,48	1,0	± 0,030	500	4.000
16,0	01040162	17,0	17,27	26,0	25,48	1,2	± 0,035	600	4.800
18,0	01040170	19,0	19,33	30,0	29,48	1,4	± 0,035	500	4.000
20,0	01040197	21,0	21,33	33,0	32,38	1,4	± 0,035	500	2.000