


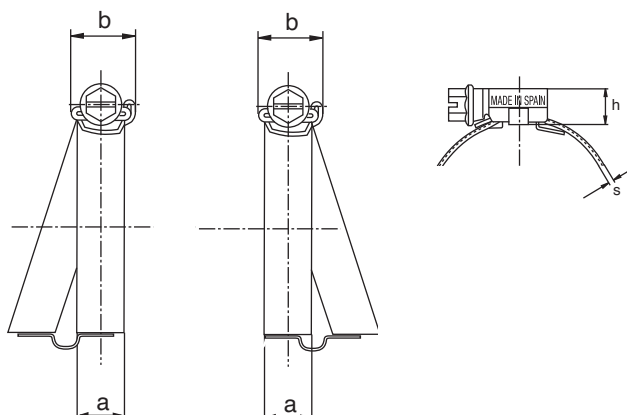

ASFA L Bridge Clamp with 9mm bandwidth and manufactured with one or two bridges are an ideal solution for hoses with an outer helix. The geometry and design of the bridges ensure a leaktight fit. These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.

* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.

MATERIAL: Available in:
W1 - galvanized
W2 - AISI 430
W3 - AISI 430
W4 - AISI 304
W5 - AISI 316

FINISH: W1: Zinc plated
W2 / W3 / W4 / W5:

CORROSION RESISTANCE: Stainless steel
According to the material

Ø Application mm	Number of bridges	Bridge location	S +0.10	h Máx.	a +0.3 a -0.2	b Max.	Pressure (Bar)	Box Quantity
25-40	1	right/left	0,7	10	9	14	30	100
30-45	1	right/left	0,7	10	9	14	26	100
32-50	1-2	right/left	0,7	10	9	14	22	100
40-60	1-3	right/left	0,7	10	9	14	18	100
50-70	1-4	right/left	0,7	10	9	14	16	100
60-80	1-5	right/left	0,7	10	9	14	14	100
70-90	1-6	right/left	0,7	10	9	14	12	50
80-100	1-7	right/left	0,7	10	9	14	10	50
90-110	1-8	right/left	0,7	10	9	14	9	25
100-120	1-9	right/left	0,7	10	9	14	8	25
110-130	1-10	right/left	0,7	10	9	14	7	25
120-140	1-11	right/left	0,7	10	9	14	6	25
130-150	1-12	right/left	0,7	10	9	14	5	25
140-160	1-13	right/left	0,7	10	9	14	4	25