


# DIN 1478 closed body turnbuckle jaw/jaw

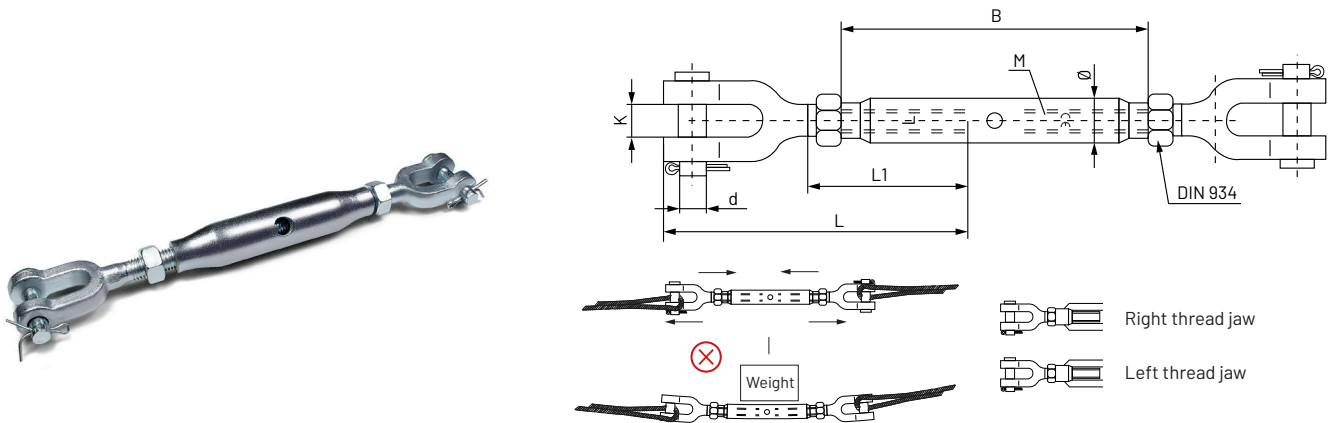

It is the perfect turnbuckle if the highest safety level and traction resistance are required for tensioning or rigging wires.

The bolt design of each jaw ensures maximum reliability due to the stop at one end and the pin at the opposite end.

TIPS: The quality of the finish guarantees a very good corrosion resistance. In order not to compromise safety, the SWL established for each size must never be exceeded.

**MATERIAL:** Steel C15  
**FINISH:** Zinc plated

Thread size (Metric)	Denom.	Part Number	B	L	L1	K	d	Ø	Workload S.W.L (kg)	Box Qty.	Outer Box Qty.
M6	TTHH106	09526809	110	101	63	7	5	14,5	70	25	125
M8	TTHH108	09526817	110	110	63	9	6	17,2	140	25	75
M10	TTHH110	09526825	125	125	72	10,5	8	21	220	25	25
M12	TTHH112	09526833	125	138	75	13	10	24,7	310	10	10
M16	TTHH116	09526850	170	175	100	18	12	29,6	600	5	5
M20	TTHH120	09526868	200	213	120	20	16	33,3	910	5	5
M24	TTHH124	09526884	255	275	157	30	22	42	1.300	1	20
M30	TTHH130	09526905	255	300	150	42	28	51	2.100	1	10
M36	TTHH136	09526921	295	392	180	52	32	63	2.300	1	1