


DIN 1480 turnbuckle welding rod

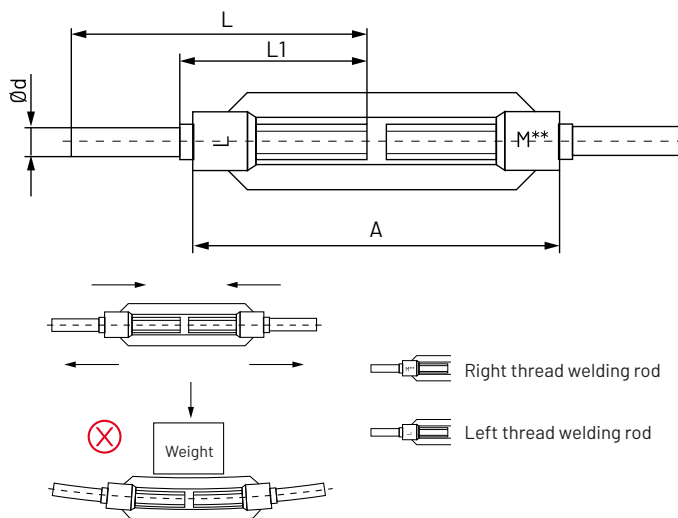

Especially designed and indicated to weld wires or preferably a steel rod in each of the rods of the turnbuckle.

TIPS: To obtain maximum performance and maximum safety from the turnbuckle, it is essential that the welding is very precise. The SWL established for each size must never be exceeded.

MATERIAL: Steel C15
FINISH: Zinc plated

Thread size (Metric)	Denom.	Part Number	L	L1	A	Ød	Workload S.W.L (kg)	Box Quantity	Outer Box Quantity
M6	TVS106	09521514	120	65	110	5,25	70	50	50
M8	TVS108	09521522	120	65	110	7,10	140	25	25
M10	TVS110	09521530	150	75	125	8,90	220	25	25
M12	TVS112	09521557	150	75	125	10,70	310	25	25
M14	TVS114	09521565	162	85	140	12,50	450	10	10
M16	TVS116	09521573	200	100	170	14,50	600	10	10
M20	TVS120	09521581	220	120	200	18,10	910	5	5
M22	TVS122	09521590	220	130	220	20,10	1.100	1	25
M24	TVS124	09521602	260	150	255	21,70	1.300	1	40
M30	TVS130	09521629	260	160	255	27,35	2.100	1	30
M32	TVS132	09521637	260	160	295	30,35	2.150	1	4
M36	TVS136	09521645	300	180	295	33,00	2.300	1	10