


DIN 1478 closed body turnbuckle hook/eye

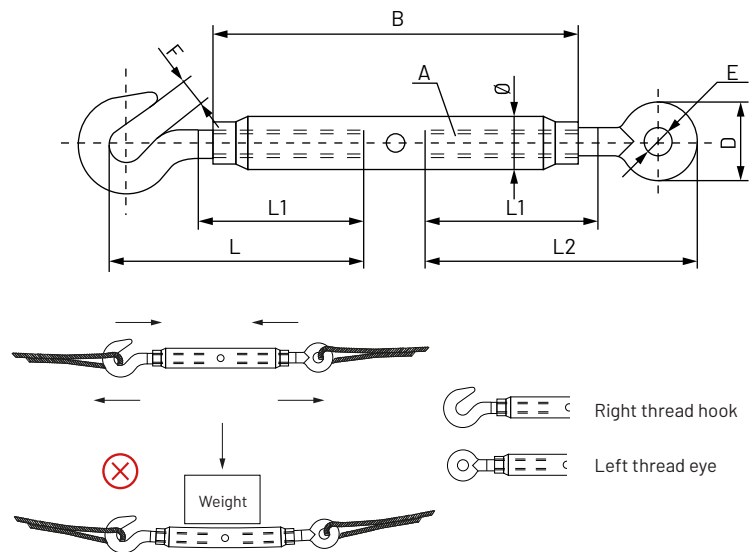

Its tubular body protects the threading mechanism from bumps, chips and other elements not related to its functionality. It is also useful when a more aesthetic solution is required.

It is a good solution for rigging or tensioning wires, ropes, ringed bars, etc. It is very fast and efficiently assembled when both ends are hook type.

MATERIAL: Steel C15
FINISH: Zinc plated

TIPS: The quality of the finish guarantees good corrosion resistance. In order not to compromise safety, the SWL established for each size must never be exceeded.

Thread size (Metric)	Denom.	Part Number	B	Ø	L	L1	L2	D	E	F	Workload S.W.L (kg)	Box Quantity	Outer Box Qty.
M5	TTGA105	09526200	70	14,5	56	35	57	16	8	7	60	50	200
M6	TTGA106	09526219	110	14,5	77	55	80	20	9	8	70	50	300
M8	TTGA108	09526227	110	17,2	85	57	85	22	10	9,5	140	25	150
M10	TTGA110	09526235	125	21	106	68	105	31	14	12	220	25	75
M12	TTGA112	09526251	125	24,7	117	70	111	35	16	15	310	10	50
M16	TTGA116	09526278	170	29,6	144	88	150	47	22	19	600	10	10
M20	TTGA120	09526286	200	33,3	170	105	168	52	24	20	910	5	5
M22	TTGA122	09526294	220	35,6	200	118	190	60	28	23	1.100	1	1
M24	TTGA124	09526307	255	42	215	135	212	65	28	25	1.300	1	25
M30	TTGA130	09526323	255	51	240	135	224	71	31	31	2.100	1	1
M36	TTGA136	09526340	295	63	275	160	277	94	38	44	2.300	1	15