
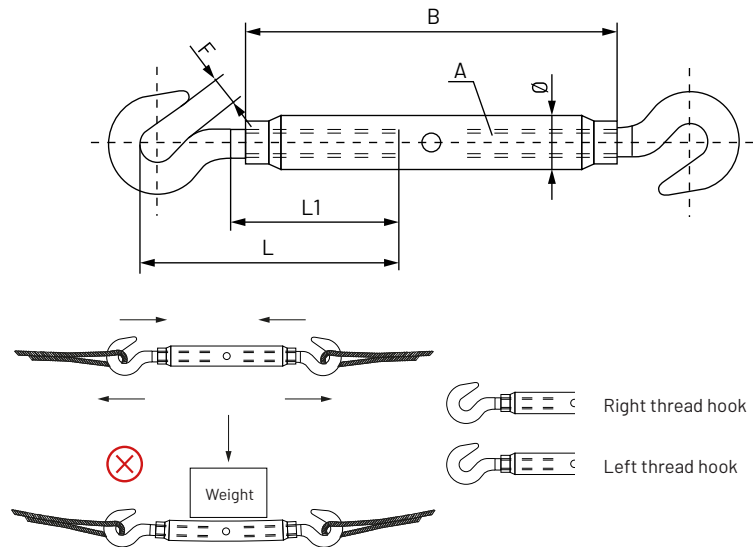


DIN 1478 closed body turnbuckle hook/hook

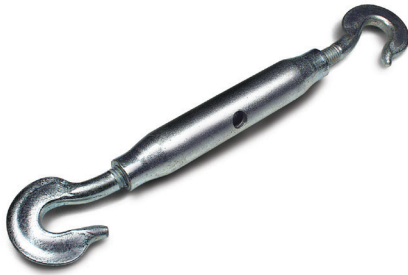

Its tubular body protects the threading mechanism from bumps, chips and other elements not related to its functionality. It is also useful when a more aesthetic solution is required.

MATERIAL: Steel C15
FINISH: Zinc plated

It is a good solution for rigging or tensioning wires, ropes, ringed bars, etc. It is very fast and efficiently assembled when both ends are hook type.

TIPS: The quality of the finish guarantees good corrosion resistance. In order not to compromise safety, the SWL established for each size must never be exceeded.

Thread size (Metric)	Denom.	Part Number	B	Ø	L	L1	F	Workload S.W.L (kg)	Box Qty.	Outer Box Qty.
M5	TTGG105	09526606	70	14,5	56	35	7	60	50	200
M6	TTGG106	09526614	110	14,5	77	55	8	70	50	50
M8	TTGG108	09526622	110	17,2	85	57	9,5	140	25	150
M10	TTGG110	09526630	125	21	106	68	12	220	25	75
M12	TTGG112	09526657	125	24,7	117	70	15	310	10	50
M16	TTGG116	09526673	170	29,6	144	88	19	600	10	10
M20	TTGG120	09526681	200	33,3	170	105	20	910	5	5
M24	TTGG124	09526690	255	42	215	135	25	1.300	1	20
M30	TTGG130	09526710	255	51	240	135	31	2.100	1	1
M36	TTGG136	09526737	295	63	275	160	44	2.300	1	1