


DIN 1478 closed body turnbuckle eye/eye

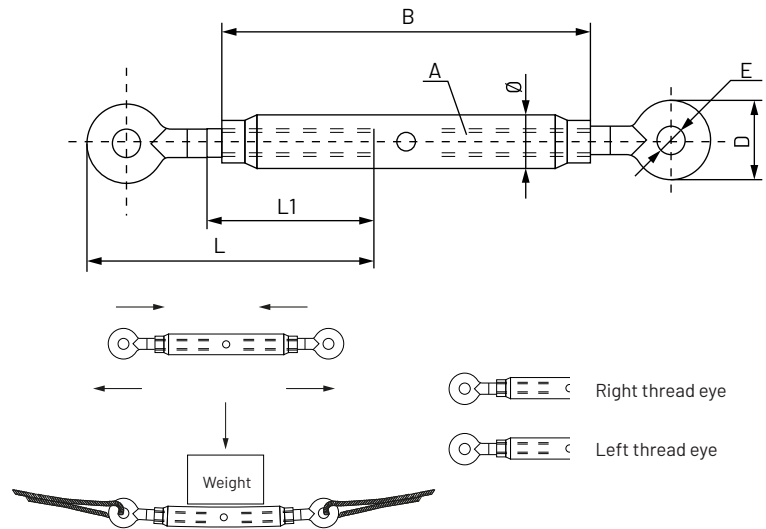

Its tubular body protects the threading mechanism from bumps, chips and other elements not related to its functionality.

It is also useful when a more aesthetic solution is required. As both ends are rings, the safety level is higher and traction resistance in the tensioning or rigging of wires is greater as well.

MATERIAL: Steel C15
FINISH: Zinc plated

Thread size (Metric)	Denom.	Part Number	B	Ø	L1	L	D	E	Workload S.W.L (kg)	Box Qty.	Outer Box Qty.
M5	TTAA105	09526403	70	14,5	35	57	16	8	60	50	400
M6	TTAA106	09526411	110	14,5	55	80	20	9	70	50	200
M8	TTAA108	09526420	110	17,2	57	85	22	10	140	25	100
M10	TTAA110	09526438	125	21	68	105	31	14	220	25	75
M12	TTAA112	09526454	125	24,7	70	111	35	16	310	10	50
M16	TTAA116	09526470	170	29,6	88	150	47	22	600	10	10
M20	TTAA120	09526489	200	33,3	105	168	52	24	910	5	5
M24	TTAA124	09526500	255	42	135	212	65	28	1.300	1	30
M30	TTAA130	09526526	255	51	135	224	71	31	2.100	1	30
M36	TTAA136	09526542	295	63	160	277	94	38	2.900	1	20