


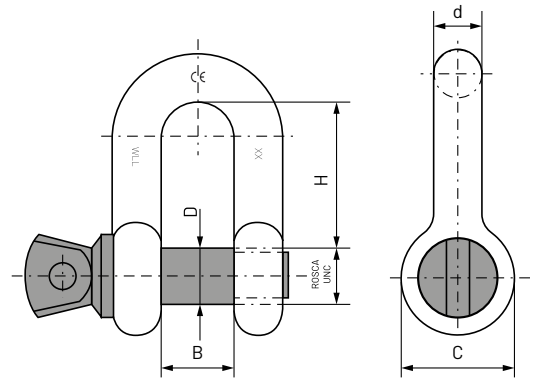

The high-resistance steel component of its structure ensures that great working loads can be lifted with a smaller shackle, thus facilitating its handling. Each shackle is marked with its size and its working load in tonnes, guaranteeing the correct choice and, therefore, increasing safety.

TIPS: For correct assembly, the hook must always be attached to the shackle bolt and the sling, the wire or rope must be attached to the shackle bow. Assembly must never be carried out in reverse order.

MATERIAL: High resistance steel
Body: Steel C45
Shackle bolt: Alloy steel

FINISH: Body: Galvanized
Shackle bolt: Red

In order not to compromise safety, the SWL established for each size must never be exceeded.

Nominal size (mm)	Denomination	Part Number	B	D	d	H	C	Workload W.L.L (kg)	Box Quantity	Outer Box Quantity
5	GRAR105	09527908	8,73	6,35	4,76	19,05	14,29	330	50	800
6	GRAR106	09527916	11,91	7,94	6,35	22,23	17,46	500	50	400
8	GRAR108	09527924	13,49	9,53	7,94	26,19	20,64	750	50	300
10	GRAR110	09527932	16,67	11,11	9,53	31,75	24,61	1.000	50	150
12	GRAR112	09527959	20,64	15,88	12,70	41,28	30,16	2.000	25	75
16	GRAR116	09527975	26,99	19,05	15,88	50,80	39,69	3.250	25	75
19	GRAR119	09527991	31,75	22,23	19,05	60,33	47,63	4.750	5	20
22	GRAR122	09528003	36,51	25,40	22,23	71,44	53,98	6.500	1	8
28	GRAR128	09528020	46,04	31,75	25,58	90,49	66,68	9.500	1	4
32	GRAR132	09528038	51,59	34,93	31,75	100,01	76,20	12.000	1	3
35	GRAR135	09528046	57,15	38,10	34,93	111,13	84,14	13.500	1	1
45	GRAR145	09528070	73,03	50,80	44,45	146,05	104,78	25.000	1	1