


DIN 689 lifting hook with safety latch

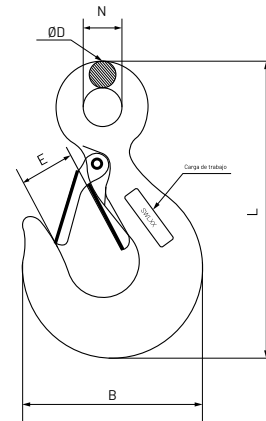

The quality of the latch-activating spring makes it fast to operate without altering the safety level required by the process of lifting or moving loads. Each hook is marked with its working load in tonnes and with the material-identifying symbol: (C) for carbon steel hooks and (A) for alloy steel hooks, guaranteeing the correct choice.

TIPS: In order not to compromise safety, the SWL established for each hook must never be exceeded.

MATERIAL: Steel C15
FINISH: Hook: Red
 Dock and safety lock:
 Zinc plated

Denomination	Part Number	N ±0.5	B ±0.1	E ±1.2	ØD ±0.5	L ±1	Workload W.L.L (kg)	Box Quantity	Outer Box Quantity
GS 0250	09523317	12	52,5	18	7,5	88	250	10	100
GS 0500	09523325	16	70	23	10	117	500	10	75