


Alloy steel lifting hook with safety latch

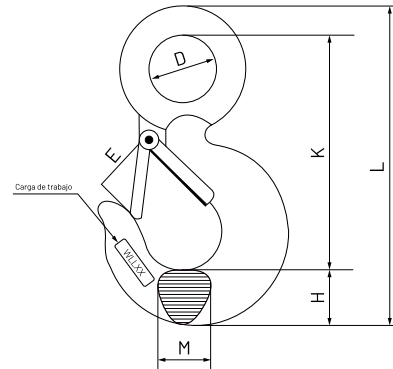

The quality of the latch-activating spring makes it fast to operate without altering the safety level required by the process of lifting or moving loads. Each hook is marked with its working load in tonnes and with the material-identifying symbol: (C) for carbon steel hooks and (A) for alloy steel hooks, guaranteeing the correct choice.

TIPS: In order not to compromise safety, the SWL established for each hook must never be exceeded.

MATERIAL: Alloy steel
FINISH: Hook: Red
 Dock and safety lock:
 Zinc plated

Denomination	Part Number	D	E	H	K	M	L	Workload W.L.L (kg)	Box Quantity	Outer Box Quantity
GSAA 3000	09529161	31	27,5	28	119	23	162	3.000	1	15
GSAA 4500	09529170	39	33	37	146	30	201	4.500	1	8
GSAA 7000	09529181	51	40	46,5	186,5	38	256	7.000	1	1