


Swivel hook with safety latch

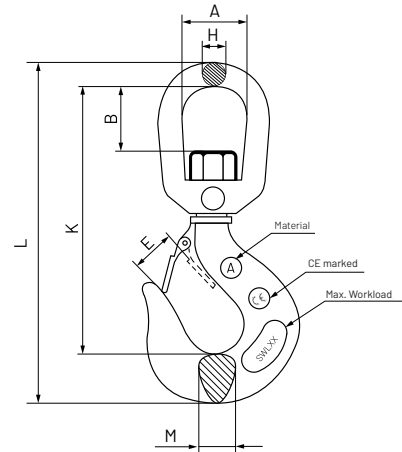

Its convenient design, careful forging and controlled precision of the heat treatment result in the maximum working load without excessive hook weight and size. A DIN 1481 pin set in the centre of the nut and in the threaded part of the hook provides a perfect connection that prevents loosening and guarantees maximum functional safety.

Each hook is marked with its working load in tonnes and with the material-identifying symbol, guaranteeing the correct choice and, therefore, increasing safety.

TIPS: In order not to compromise safety, the SWL established for each size must never be exceeded.

MATERIAL: Grade 80 alloy steel
FINISH: Red

Denomination	Part Number	A	E	B	H	K	L	M	Workload W.L.L (kg)	Box Quantity	Outer Box Quantity
GG5 1000	09529188	32	17	22,5	9	108,3	137	16	1.000	1	30
GG5 2000	09529209	42,5	26	33	15,8	150,5	192	17,5	2.000	1	10
GG5 3000	09529217	42,5	26	33	15,8	163	209	23	3.000	1	10
GG5 4000	09528708	54	36	55	19	220	275	24	4.000	1	5
GG5 6300	09529583	65	46	65	24	260	325	34	6.300	1	5