

DIN 7504-K self-drilling screw with EPDM washer





FEATURES



Hex with stamped washer



Drill point

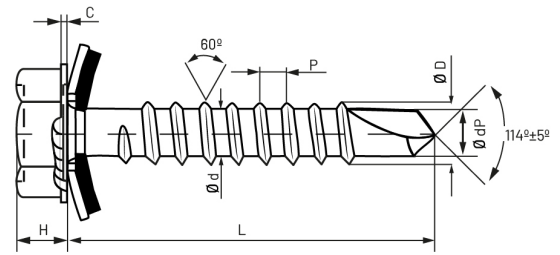

L < 90 mm S= Total
L: 90 ~ 100 mm S= 75 mm. partial

Manufactured in case-hardened steel. The washer incorporated into the design of the head allows for a greater area to be fastened. These screws are mainly recommended for use directly on metallic sheets or steel and aluminium profiles.

Suitable for fixing façades and metal coverings in steel structures, especially in outdoor applications.

MATERIAL: Screw: C1018-C1022
case hardened steel
Gasket: EPDM rubber EP74V

FINISH: Washer: Steel-Sheet EN 10142

HARDNESS: Dx51(1.0226)
Screw and washer: Zinc plated
Screw: Surface hardness Min. 500 HV
Core hardness 240-450 HV
Board: 70-76°shore

Size Ø D x L - Ø D1	Part Number	Ø D	L	A	H	B	C	Ø d	Ø dp Max.	P Thread pitch	Drill capacity	Box Quantity	Outer Box Quantity
4,8x19-14	04390413	4,8	19	8	4,3	10	1,6	3,58	4,10	1,6	1,75 - 4,40	500	5.000
4,8x25-14	04390423	4,8	25	8	4,3	10	1,6	3,58	4,10	1,6	1,75 - 4,40	500	5.000
4,8x16-16	04390433	4,8	16	8	4,3	10	1,6	3,58	4,10	1,6	1,75 - 4,40	500	5.000
4,8x19-16	04390443	4,8	19	8	4,3	10	1,6	3,58	4,10	1,6	1,75 - 4,40	500	5.000
4,8x25-16	04390453	4,8	25	8	4,3	10	1,6	3,58	4,10	1,6	1,75 - 4,40	500	5.000
4,8x32-16	04390463	4,8	32	8	4,3	10	1,6	3,58	4,10	1,6	1,75 - 4,40	400	4.000
4,8x38-16	04390473	4,8	38	8	4,3	10	1,6	3,58	4,10	1,6	1,75 - 4,40	400	4.000
5,5x19-16	04390483	5,5	19	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	500	5.000
5,5x22-16	04390493	5,5	22	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	500	5.000
5,5x25-16	04390513	5,5	25	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	500	5.000
5,5x32-16	04390523	5,5	32	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	350	3.500
5,5x38-16	04390533	5,5	38	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	350	3.500
5,5x50-16	04390543	5,5	50	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	250	2.500
5,5x63-16	04390553	5,5	63	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	200	2.000





FEATURES



Hex with stamped washer



Drill point

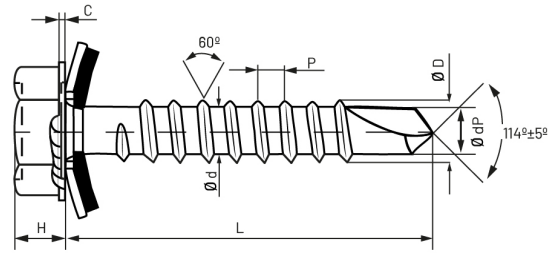

L < 90 mm S= Total
L: 90 - 100 mm S= 75 mm. partial

Size Ø D x L - Ø D1	Part Number	Ø D	L	A	H	B	C	Ø d	Ø dp Max.	P Thread pitch	Drill capacity	Box Quantity	Outer Box Quantity
5,5x22-18	04390503	5,5	22	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	500	5.000
5,5x25-18	04390603	5,5	25	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	500	5.000
5,5x32-18	04390613	5,5	32	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	350	3.500
5,5x38-18	04390623	5,5	38	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	350	3.500
5,5x50-18	04390633	5,5	50	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	250	2.500
5,5x22-25	04390733	5,5	22	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	500	5.000
5,5x25-25	04390743	5,5	25	8	5,1	10,5	1,9	4,17	4,80	1,8	1,75 - 5,25	400	4.000
6,3x19-16	04390563	6,3	19	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	350	3.500
6,3x25-16	04390573	6,3	25	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	300	3.000
6,3x32-16	04390583	6,3	32	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	300	3.000
6,3x38-16	04390593	6,3	38	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	300	3.000
6,3x25-18	04390643	6,3	25	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	400	4.000
6,3x32-18	04390653	6,3	32	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	300	3.000
6,3x38-18	04390663	6,3	38	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	300	3.000
6,3x50-18	04390673	6,3	50	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	180	1.800
6,3x63-18	04390683	6,3	63	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	150	1.500
6,3x75-18	04390693	6,3	75	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	150	1.500
6,3x80-18	04390703	6,3	80	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	100	1.000
6,3x90-18	04390713	6,3	90	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	100	1.000
6,3x100-18	04390723	6,3	100	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	100	1.000
6,3x25-25	04390753	6,3	25	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	400	4.000
6,3x50-25	04390763	6,3	50	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	180	1.800
6,3x63-25	04390773	6,3	63	10	6,3	12,6	2,0	4,88	5,80	1,8	2,50 - 6,00	150	1.500