


TAS-DME expansion anchor special

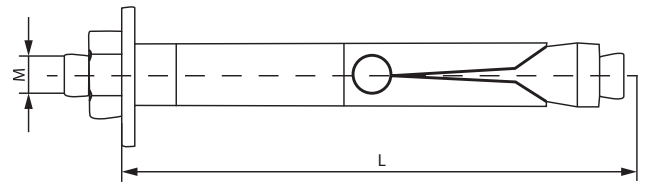

It works just like metal screw anchors. A hole must be drilled beforehand to place the anchor, then, the device is anchored to the walls of the base material by the pressure created by the expansion of the sleeve as the set screw is being threaded. Its built-in nut helps to fix the element to be fastened or fixed.

MATERIAL: Carbon steel
Red nylon ring

FINISH: White zinc plated

Measure M x L	Part Number	Ø Drill mm	Depth Drill	Torque kg/m	Thickness mm	Max. Load kg	Box Quantity	Outer Box Quantity
6 x 45	09108080	8	45	10	5	335	250	1.000
6 x 45	09108083	9	45	10	5	335	250	1.000
6 x 60	09108178	9	60	10	15	335	200	600
8 x 60	09108096	10	60	25	5	595	200	600
8 x 60	09108098	11	60	25	5	595	100	600
8 x 80	09108102	10	80	25	15	620	100	400
8 x 80	09108100	11	80	25	15	620	100	400
10 x 70	09108117	12	70	35	5	795	50	200
10 x 70	09108119	14	70	35	5	795	100	200
10 x 100	09108127	14	100	35	25	965	75	150