

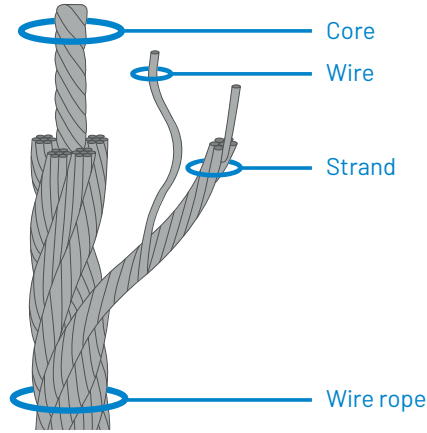


# Galvanized steel wire rope – 6 x 19 + 1

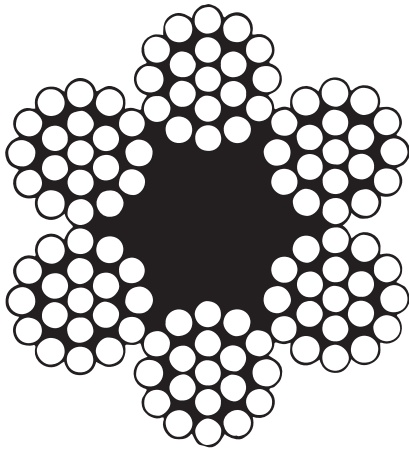

Galvanized steel wire rope 6 x 19 + 1 (FC) is a mechanical element manufactured to maintain a balance between hardness, strength, abrasion, crushing, fatigue and corrosion. The technology used to manufacture steel wire rope is in constant development. Its main characteristics are the wires that make it up, the way they are arranged, how the strands are formed and how they are wound around the core. Thanks to their resistance, strength, durability, thickness and flexibility, steel wire ropes are used in countless applications and locations. UNIQ steel wire rope combines reliability, safety and high performance.




- CORE:** Fibre
- LAY:** Regular lay
- FINISH:** Galvanized
- USES:** Static cable, Winch, Slings

Certification UNE-EN 12385-4.

### Presentation: Reel

Measure Ø Nominal	Part Number	Length m	Minimum Breaking Load 1770 N/mm <sup>2</sup>	Weight kg/100 m	Format of presentation	Reel dimensions	
						Ø Inside mm	Ø Outside mm
3	09202016	15	4,89	3,22	Plastic reel	48	120
3	09202027	25	4,89	3,22	Plastic reel	48	114
3	09202038	50	4,89	3,22	Plastic reel	48	133
3	09202049	100	4,89	3,22	Plastic reel	27	200
4	09202111	15	8,69	5,73	Plastic reel	48	140
4	09202122	25	8,69	5,73	Plastic reel	50	200
4	09202133	50	8,69	5,73	Plastic reel	50	200
4	09202144	100	8,69	5,73	Plastic reel	27	200
5	09202216	15	13,6	8,96	Plastic reel	50	200
5	09202227	25	13,6	8,96	Plastic reel	50	200
5	09202238	50	13,6	8,96	Plastic reel	50	200
5	09202249	100	13,6	8,96	Plastic reel	27	200




# Galvanized steel wire rope – 6 x 19 + 1

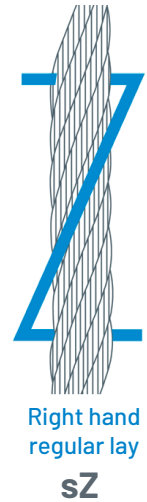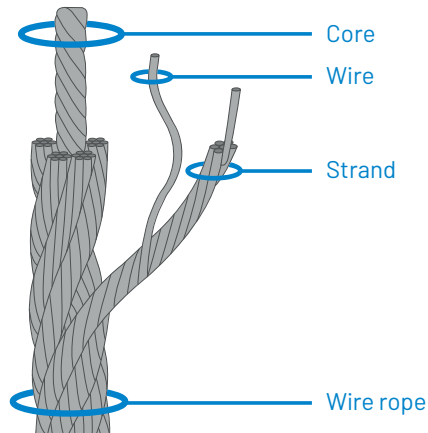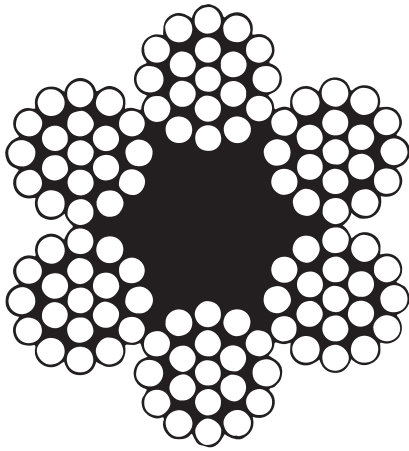

## Presentation: Reel

Measure Ø Nominal	Part Number	Length m	Minimum Breaking Load 1770 N/mm <sup>2</sup>	Weight kg/100 m	Format of presentation	Reel dimensions	
						Ø Inside mm	Ø Outside mm
6	09202311	15	19,6	12,88	Plastic reel	27	200
6	09202322	25	19,6	12,88	Plastic reel	27	200
6	09202333	50	19,6	12,88	Plastic reel	27	200
6	09202344	100	19,6	12,88	Plastic reel	55	250
7	09202416	15	26,6	18,25	Plastic reel	50	200
7	09202427	25	26,6	18,25	Plastic reel	50	200
7	09202438	50	26,6	18,25	Plastic reel	50	200
7	09202449	100	26,6	18,25	Plastic reel	50	200
8	09202511	15	34,8	22,88	Plastic reel	27	200
8	09202522	25	34,8	22,88	Plastic reel	27	200
8	09202533	50	34,8	22,88	Plastic reel	50	250
8	09202544	100	34,8	22,88	Wooden reel	55	250
9	09202616	15	44,0	29,00	Plastic reel	50	200
9	09202627	25	44,0	29,00	Plastic reel	50	200
9	09202638	50	44,0	29,00	Wooden reel	48	250
9	09202649	100	44,0	29,00	Wooden reel	48	300
10	09202711	15	54,3	35,72	Plastic reel	50	200
10	09202722	25	54,3	35,72	Plastic reel	55	250
10	09202733	50	54,3	35,72	Wooden reel	55	250
10	09202744	100	54,3	35,72	Wooden reel	55	300

# Galvanized steel wire rope - 6 x 19 + 1

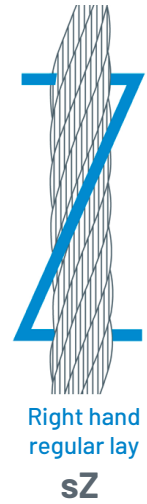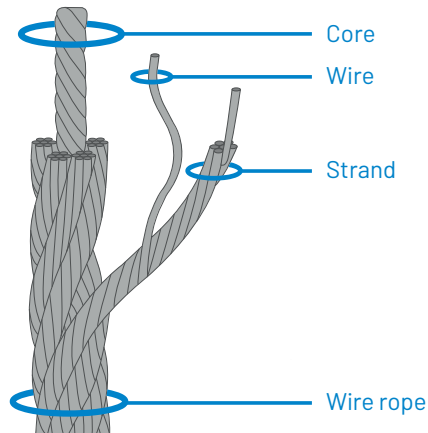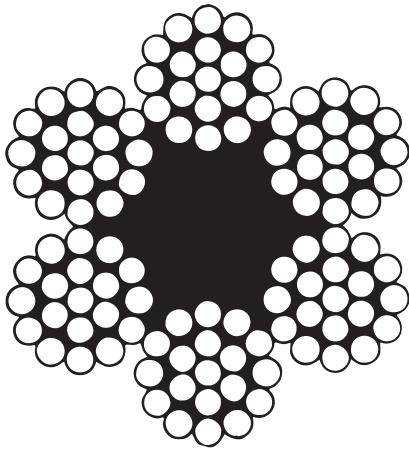

## Presentation: Shrink-wrapped

Measure Ø Nominal	Part Number	Length m	Minimum Breaking Load 1770 N/mm <sup>2</sup>	Weight kg/100 m	Format of presentation
3	09202017	15	4,89	3,22	Shrink-wrapped
4	09202112	15	8,69	5,73	Shrink-wrapped
5	09202217	15	13,6	8,96	Shrink-wrapped
6	09202312	15	19,6	12,88	Shrink-wrapped
8	09202512	15	34,8	22,88	Shrink-wrapped
10	09202712	15	54,3	35,72	Shrink-wrapped