

ASFA L Bridge Clamp with 9 mm bandwidth and manufactured with one or two bridges are an ideal solution for hoses with an outer helix. The geometry and design of the bridges ensure a leaktight fit. These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.


* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.

MATERIAL: Stainless Steel
W2 (AISI 430)

CORROSION RESISTANCE: 72 hours salt spray test
ASTM B-117

ASFA-L Hose Clamp with one bridge

Size	Part Number	Ø Application	h Max.	b Max.	s Min.	c +0.3-0.1	k Max.	Max. Pressure (BAR)	Box Quantity
32-50	A1PD3250W2L	32-46	10,5	14	0,75	9	25,6	24	100
40-60	A1PD4060W2L	40-56	10,5	14	0,75	9	25,6	19	100
50-70	A1PD5070W2L	50-66	10,5	14	0,75	9	29,6	17	100
60-80	A1PD6080W2L	60-76	10,5	14	0,75	9	29,6	15	100
70-90	A1PD7090W2L	70-86	10,5	14	0,75	9	29,6	13	50
80-100	A1PD80100W2L	80-96	10,5	14	0,75	9	29,6	11	50
90-110	A1PD90110W2L	90-106	10,5	14	0,75	9	29,6	10	25
100-120	A1PD100120W2L	100-116	10,5	14	0,75	9	29,6	9	25
110-130	A1PD110130W2L	110-126	10,5	14	0,75	9	29,6	8	25
120-140	A1PD120140W2L	120-136	10,5	14	0,75	9	29,6	7	25
130-150	A1PD130150W2L	130-146	10,5	14	0,75	9	29,6	6	25
140-160	A1PD140160W2L	140-156	10,5	14	0,75	9	29,6	5	25

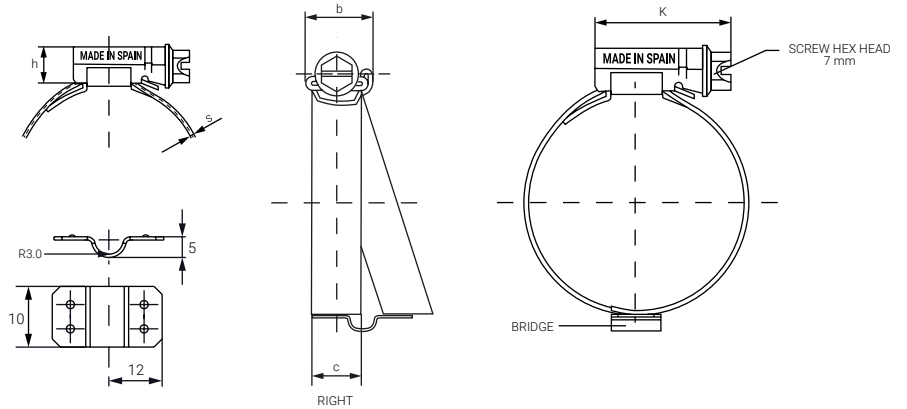

ASFA-L Hose Clamp with double bridge

Size	Part Number	Ø Application	h Max.	b Max.	s Min.	c +0.3-0.1	k Max.	Max. Pressure (BAR)	Box Quantity
32-50	A2PD3250W2L	32-43	10,5	14	0,75	9	25,6	24	100
40-60	A2PD4060W2L	40-53	10,5	14	0,75	9	25,6	19	100
50-70	A2PD5070W2L	50-63	10,5	14	0,75	9	29,6	17	100
60-80	A2PD6080W2L	60-73	10,5	14	0,75	9	29,6	15	100
70-90	A2PD7090W2L	70-83	10,5	14	0,75	9	29,6	13	50
80-100	A2PD80100W2L	80-93	10,5	14	0,75	9	29,6	11	50
90-110	A2PD90110W2L	90-103	10,5	14	0,75	9	29,6	10	25
100-120	A2PD100120W2L	100-113	10,5	14	0,75	9	29,6	9	25
110-130	A2PD110130W2L	110-123	10,5	14	0,75	9	29,6	8	25
120-140	A2PD120140W2L	120-133	10,5	14	0,75	9	29,6	7	25
130-150	A2PD130150W2L	130-143	10,5	14	0,75	9	29,6	6	25
140-160	A2PD140160W2L	140-153	10,5	14	0,75	9	29,6	5	25