


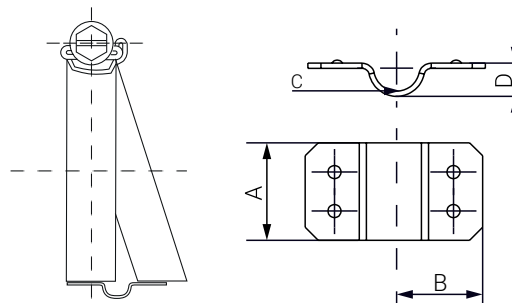

Right-hand bridge

ASFA-S Bridge Clamp with 12 mm bandwidth and manufactured with one or two bridges are an ideal solution for hoses with an outer helix. The geometry and design of the bridges ensure a leaktight fit. These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.

MATERIAL: Stainless steel
W2 AISI 430

CORROSION RESISTANCE: 72 hours Salt Spray
Test ASTM B-117

1 BRIDGE

Part Number	Dimension	Effective Clamping Range		Bridge Dimensions			Box Quantity
		1 Bridge	A	B	C	D	
A1PD3250W2S	32-50	32-46	10	16	3	7	100
A1PD4060W2S	40-60	40-56	10	16	3	7	100
A1PD5070W2S	50-70	50-66	10	16	3	7	100
A1PD6080W2S	60-80	60-76	10	16	3	7	100
A1PD7090W2S	70-90	70-86	10	16	3	7	50
A1PD80100W2S	80-100	80-96	10	16	3	7	50
A1PD90110W2S	90-110	90-106	10	16	3	7	25
A1PD100120W2S	100-120	100-116	10	16	3	7	25
A1PD110130W2S	110-130	110-126	10	16	3	7	25
A1PD120140W2S	120-140	120-136	10	16	3	7	25
A1PD130150W2S	130-150	130-146	10	16	3	7	25
A1PD140160W2S	140-160	140-156	10	16	3	7	25
A1PD150170W2S	150-170	150-166	10	16	3	7	25
A1PD160180W2S	160-180	160-176	10	16	3	7	25
A1PD170190W2S	170-190	170-186	10	16	3	7	10
A1PD180200W2S	180-200	180-196	10	16	3	7	10
A1PD190210W2S	190-210	190-206	10	16	3	7	10
A1PD200220W2S	200-220	200-216	10	16	3	7	10
A1PD210230W2S	210-230	210-226	10	16	3	7	10
A1PD220240W2S	220-240	220-236	10	16	3	7	10