


UV-1000 NYLON CABLE TIES



Manufactured in
VYDYNE® 25WSP
Polyamide 6.6

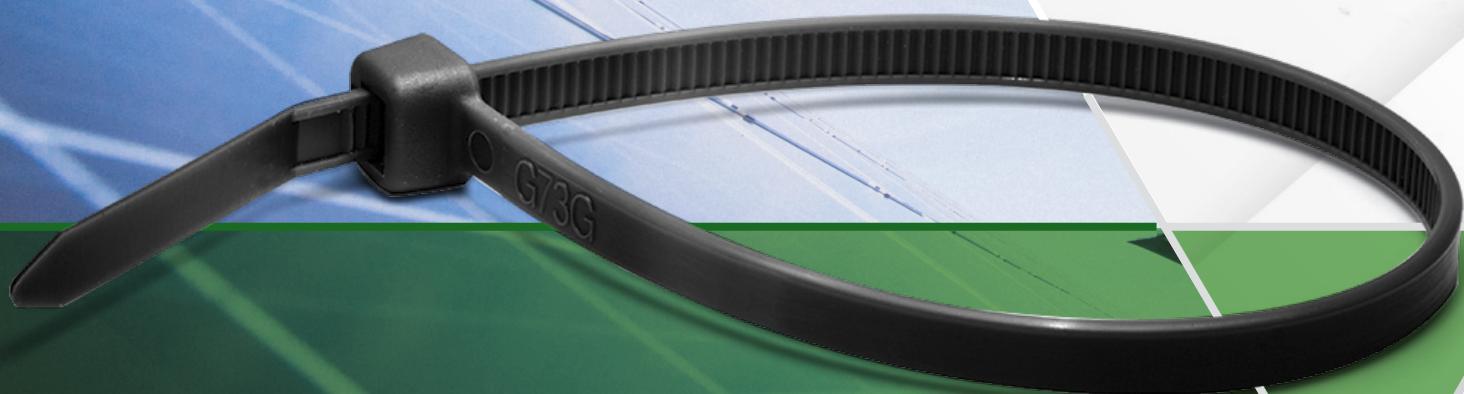

Challenge the climate

Resistant to
ULTRAVIOLET RADIATION

Tested according to
EN ISO 4892-2



**WEATHER
RESISTANT**

Useful life in outdoor
conditions
4 TIMES LONGER
THAN STANDARD PA 6.6



damesa 
www.damesa.com

UV-1000 NYLON CABLE TIES



APPLICATIONS:

- Solar panel installation
- Wind turbines
- Outdoor fencing
- Outdoor signage
- General outdoor applications




UV-1000 nylon cable ties are manufactured in **Vydyne® 25WSP Resin**, which increases the resistance to ultraviolet radiation and the useful life of these cable ties in outdoor applications by more than 4 times that of standard cable ties.

COFIL UV-1000 cable ties are particularly recommended for use in outdoor applications or in adverse weather conditions. They also have superior resistance to abrasion, chemical products, solvents and petrol. These cable ties have successfully passed UV and weather ageing resistance tests, guaranteeing **UV resistance of 1,000 hours according to EN ISO 4892-2**.

VYDYNE® 25WS PPROPERTIES

- Resistance to ultraviolet radiation
- Resistance to weather ageing
- Shock resistant
- Temperature resistant
- Consistent quality
- Stable colour

Part Number	Dimension mm	Max Ø in loop (mm)	Strength in loop (kg)	Pack size (MOQ)	Outer box size
0300003NUV	2,5 x 100	20,5	8	100	50.000
0300006NUV	2,5 x 160	39,8	8	100	25.000
0300007NUV	2,5 x 200	52,5	8	100	25.000
0300011NUV	3,6 x 140	33,0	18	100	25.000
0300014NUV	3,6 x 200	46,0	18	100	20.000
0300015NUV	3,6 x 250	68,0	18	100	10.000
0300016NUV	3,6 x 300	84,0	18	100	10.000
0300017NUV	3,6 x 370	106,0	18	100	10.000
0300021NUV	4,8 x 200	49,5	23	100	10.000
0300023NUV	4,8 x 250	65,0	23	100	10.000
0300025NUV	4,8 x 280	74,8	23	100	10.000
0300026NUV	4,8 x 300	81,0	23	100	10.000
0300027NUV	4,8 x 370	103,5	23	100	5.000
0300029NUV	4,8 x 430	122,5	23	100	5.000
0300030NUV	4,8 x 450	129,0	23	100	5.000
0300037NUV	7,6 x 200	50,9	54	100	5.000
0300038NUV	7,6 x 250	66,8	54	100	5.000
0300039NUV	7,6 x 300	82,8	54	100	5.000
0300040NUV	7,6 x 370	103,5	54	100	5.000
0300041NUV	7,6 x 450	10,5	54	100	2.000
0300042NUV	7,6 x 540	159,0	54	100	1.000
0300073NUV	7,6 x 750	224,0	54	100	1.000



These cable ties should be stored in a sealed bag. Once the bag has been opened they should be used as quickly as possible.