



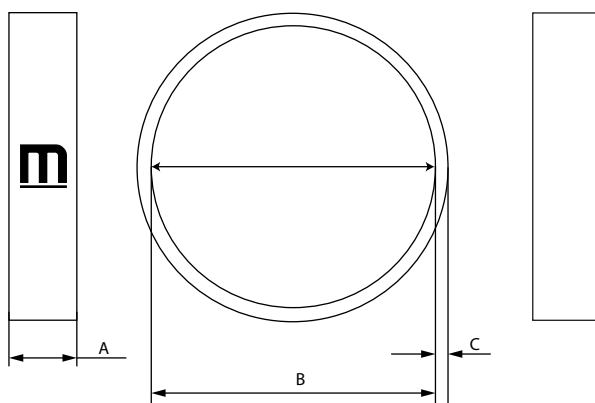

The Tubular Multi Crimp Ring is manufactured from one piece of steel without welds or rivet. This ring is used above all in series production and guarantees an excellent assembly. This is a reliable, durable and economical option which is tamper-proof once assembled. Compression rings are used to ensure a perfect assembly of hose and coupling. Once the ring has been selected which is closest to the outer diameter of the hose or tube in question, the ring is compressed or swaged using a special tool which reduces its diameter by up to 3 mm until it fits snugly in the application.

MATERIAL: W4 - Steel AISI 304
FINISH: Stainless steel
CORROSION RESISTANCE: 400 hours salt spray (ASTM B-117)

Ø Application mm	Denomination	Part Number		B ±0.5	C +0.2-0.1	Box Quantity
		A: 7 mm	A: 10 mm			
16,5-19,5	Tubular ring 20	53036085	43036085	20	1,2	200
17,5-20,5	Tubular ring 21	53036106	43036106	21	1,2	200
18,5-21,5	Tubular ring 22	53036127	43036127	22	1,2	200
19,5-22,5	Tubular ring 23	53036148	43036148	23	1,2	200
20,5-23,5	Tubular ring 24	53036169	43036169	24	1,2	200
20,5-24,5	Tubular ring 25	53036180	43036180	25	1,2	200
21,5-25,5	Tubular ring 26	53036201	43036201	26	1,2	200
22,5-26,5	Tubular ring 27	53036222	43036222	27	1,2	200
23,5-27,5	Tubular ring 28	53036243	43036243	28	1,2	200
24,5-28,5	Tubular ring 29	53036264	43036264	29	1,2	200
25,5-29,5	Tubular ring 30	53036285	43036285	30	1,2	200

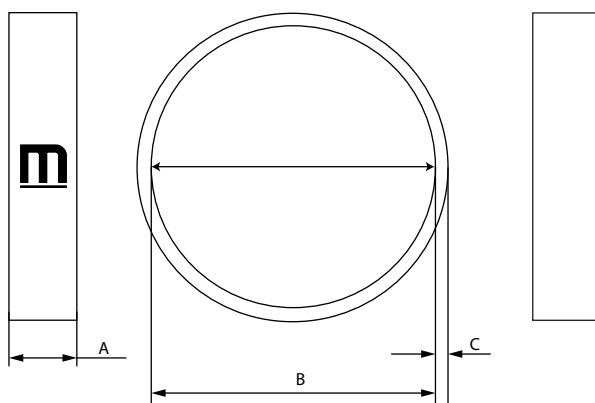

Ø Application mm	Denomination	Part Number		B ±0.5	C +0.2-0.1	Box Quantity
		A: 7 mm	A: 10 mm			
25,5-30,5	Tubular ring 31	53036306	43036306	31	1,2	200
26,5-31,5	Tubular ring 32	53036327	43036327	32	1,2	200
27,5-32,5	Tubular ring 33	53036348	43036348	33	1,2	200
28,5-33,5	Tubular ring 34	53036369	43036369	34	1,2	200
29,5-34,5	Tubular ring 35	53036380	43036380	35	1,2	200
30,5-35,5	Tubular ring 36	53036401	43036401	36	1,2	200
31,5-36,5	Tubular ring 37	53036422	43036422	37	1,2	200
32,5-37,5	Tubular ring 38	53036443	43036443	38	1,2	200
33,5-38,5	Tubular ring 39	53036464	43036464	39	1,2	200
34,5-39,5	Tubular ring 40	53036485	43036485	40	1,2	200