


Mounting yoke for washer DIN 6799

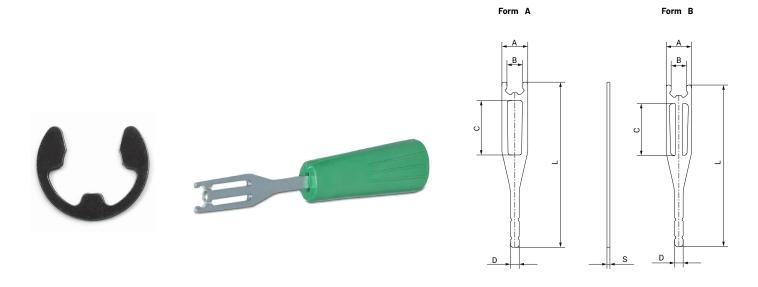

These jaws are designed to apply DIN 6799 washers, as they are difficult to assemble by hand. The jaw clamps the DIN 6799 washer so that it is completely fixed, leaving no room for it to come loose. Besides, it can be done by applying with just the right amount of effort. Once the washer is on the jaw, it can be applied and placed where needed. Once the jaw is removed, the washer is fixed onto the shaft.

MATERIAL:

Steel fork 50CRV-MP/4 Plastic handle coloured according to application diameter

Ø Nominal diameter	Part Number	L	S	Α	В	С	D	Form	Colour of handle	Box Quantity	Outer Box Quantity
1,5	03071022	90	1,2	6,0	2,7	17,0	4,8	А	White	1	1
1,9	03071033	90	1,4	6,5	3,2	18,0	4,8	А	Blue	1	1
2,3	03071044	90	1,4	8,1	4,3	19,0	4,8	А	Red	1	1
3,2	03071054	90	1,4	9,4	5,0	22,0	4,8	А	Yellow	1	1
4,0	03071066	90	1,4	11,7	7,0	23,0	4,8	В	Green	1	1
5,0	03071072	90	1,4	14,1	8,6	29,0	4,8	В	Black	1	1
6,0	03071088	95	1,9	15,8	9,6	31,5	7,0	В	White	1	1
7,0	03071120	98	1,9	18,0	11,6	32,5	7,0	В	Pink	1	1
8,0	03071099	106	1,9	20,8	13,4	36,0	7,0	В	Green	1	1
9,0	03071100	112	1,9	24,1	16,0	36,0	7,0	В	Brown	1	1
10,0	03071111	122	2,5	27,0	17,0	36,0	7,0	В	Brown	1	1
12,0	03071138	128	2,5	29,6	20,0	38,0	7,0	В	Brown	1	1