


Grade 80 clevis self-locking hook

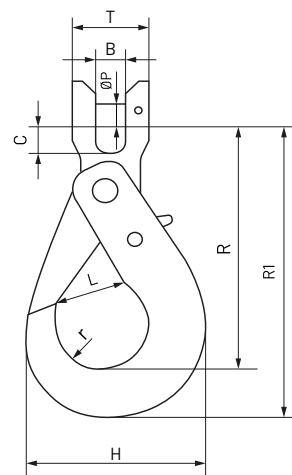

The self-locking hook is suitable for use with grade 80 chains. The self-locking device provides the maximum guarantee in terms of safety. The load's own traction force prevents accidental openings. The clevis model allows for the directional mobility of the load.

TIPS: The socket design of the opening ends of the safety latch protects from damage and friction. In order not to compromise safety, the SWL established for each size must never be exceeded.

MATERIAL: Grade 80 alloy steel
FINISH: Hook and self-closing: Red
 Pin: Black

Chain size Ø (mm)	Denom.	Part Number	B	C	L	P	R	r	T	R1	H	Workload W.L.L (kg)	Box Qty.	Outer Box Qty.
6	GAH 1200	09527158	9,2	7	28,3	8	95,5	16,5	32	130	71	1.120	1	16
7 - 8	GAH 2000	09527166	9,5	9	33,7	9	114	21	40	160	90	2.000	1	8
10	GAH 3200	09527174	13	14,5	43,1	13	142	27,5	44	195	107	3.150	1	1
13	GAH 5400	09527182	14,5	18	50,9	16	181	33,5	59	250	132	5.300	1	6
16	GAH 8000	09527190	19,2	20,2	61,6	20	205,5	41,5	74	295	170	8.000	1	25