


Grade 80 swivel self locking hook

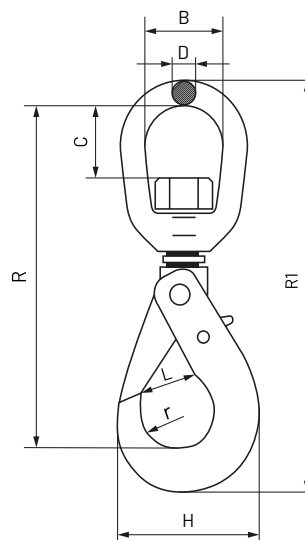

The swivel self-locking hook is suitable for use with a Grade 80 chain. The self-locking device provides the maximum guarantee in terms of safety. The load's own traction force prevents accidental openings. The eye swivel structure allows for the directional mobility of the load. The design of the assembly nut of the hook with the eye swivel by means of a DIN 1481 pin prevents it from loosening.

MATERIAL: Grade 80 alloy steel
FINISH: Hook and self-closing: Red

TIPS: The socket design of the opening ends of the safety latch protects from damage and friction. In order not to compromise safety, the SWL established for each size must never be exceeded.

Chain size Ø (mm)	Denom.	Part Number	L	R	r	B	C	D	R1	H	Workload W.L.L (kg)	Box Quantity	Outer Box Quantity
6	GAG 1200	09529760	28,3	149,5	16,5	32,5	24,5	11,5	180	71	1.120	1	20
7 - 8	GAG 2000	09529778	33,7	182	21	35	25,4	12,7	222	90	2.000	1	10
10	GAG 3200	09529786	43,1	215,5	27,5	42	32,2	15	260	107	3.150	1	6
13	GAG 5400	09529794	50,9	265,5	33,6	49	43	17,5	325	137	5.300	1	2
16	GAG 8000	09529802	61,6	323,3	41,5	61	55	21,5	395	170	8.000	1	2