


Galvanized steel PVC wire rope - 6 x 7 + 1

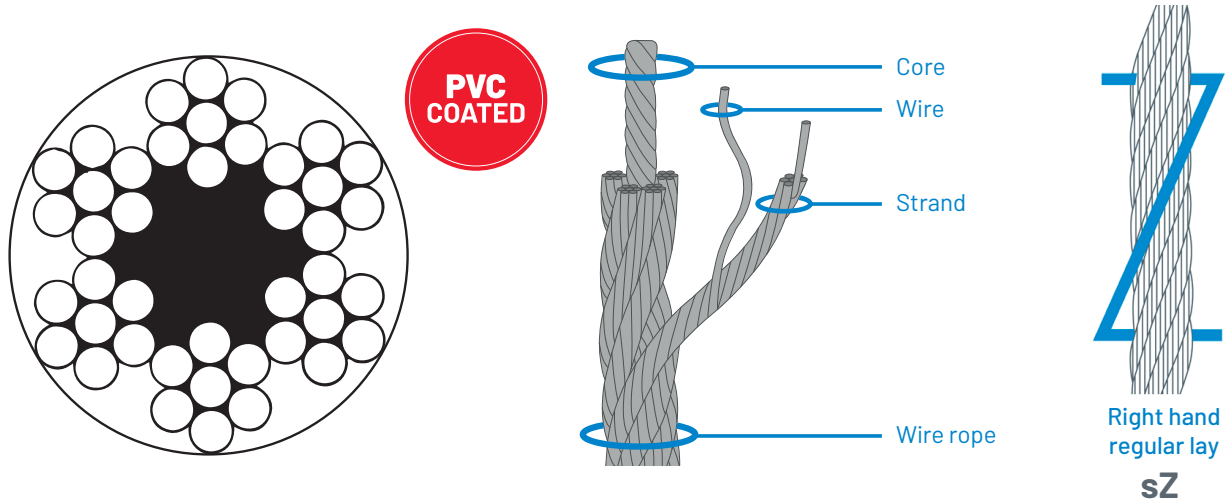

Galvanized steel wire rope with PVC coating 6 x 7 + 1 (FC) is a mechanical element manufactured to maintain a balance between hardness, strength, abrasion, crushing, fatigue and corrosion. The technology used to manufacture steel wire rope is in constant development. Its main characteristics are the wires that make it up, the way they are arranged, how the strands are formed and how they are wound around the core. Thanks to their resistance, strength, durability, thickness and flexibility, steel wire ropes are used in countless applications and locations. UNIQ steel wire rope combines reliability, safety and high performance.


CORE: Fibre
LAY: Regular lay
FINISH: Galvanized with PVC coated
USES: Static cable, Agriculture, Livestock

Certification UNE-EN 12385-4.

Presentation: Reel

Measure Ø Nominal	Part Number	Length m	Minimum Breaking Load 1770 N/mm ²	Weight kg/100 m	Format of presentation	Reel dimensions	
						Ø Inside mm	Ø Outside mm
2 x 4	09201010	15	2,35	2,87	Plastic reel	48	140
2 x 4	09201021	25	2,35	2,87	Plastic reel	48	140
2 x 4	09201032	50	2,35	2,87	Plastic reel	48	133
2 x 4	09201043	100	2,35	2,87	Plastic reel	50	200
3 x 5	09201114	15	5,29	5,12	Plastic reel	48	114
3 x 5	09201125	25	5,29	5,12	Plastic reel	27	200
3 x 5	09201136	50	5,29	5,12	Plastic reel	50	200
3 x 5	09201147	100	5,29	5,12	Plastic reel	50	200

Galvanized steel PVC wire rope - 6 x 7 + 1

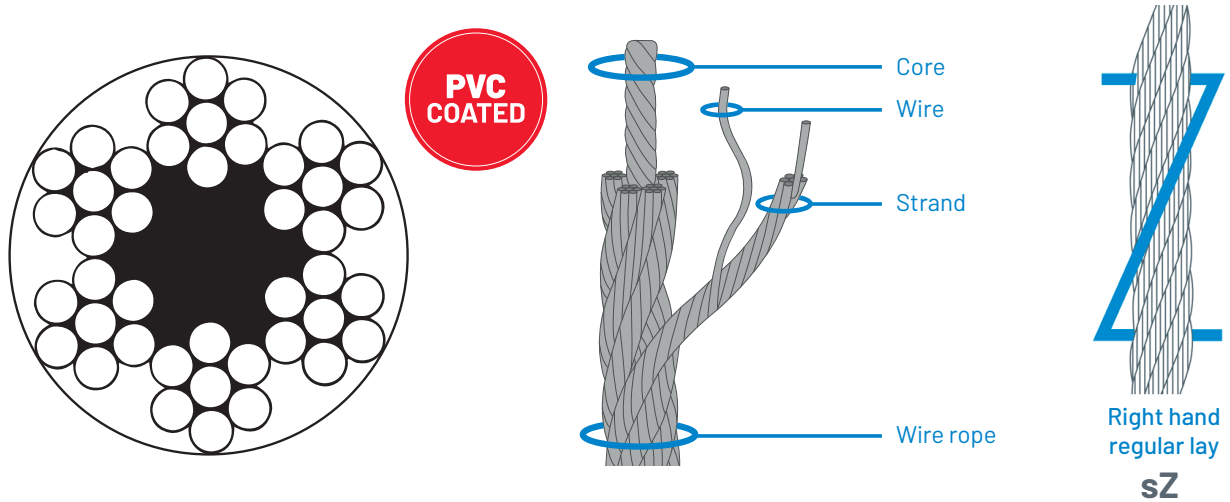

Presentation: Reel

Measure Ø Nominal	Part Number	Length m	Minimum Breaking Load 1770 N/mm ²	Weight kg/100 m	Format of presentation	Reel dimensions	
						Ø Inside mm	Ø Outside mm
4 x 6	09201218	15	9,40	8,12	Plastic reel	50	200
4 x 6	09201229	25	9,40	8,12	Plastic reel	27	200
4 x 6	09201230	50	9,40	8,12	Plastic reel	50	200
4 x 6	09201241	100	9,40	8,12	Plastic reel	55	200
5 x 7	09201312	15	14,70	11,80	Plastic reel	27	200
5 x 7	09201323	25	14,70	11,80	Plastic reel	50	200
5 x 7	09201334	50	14,70	11,80	Plastic reel	50	200
5 x 7	09201345	100	14,70	11,80	Plastic reel	48	250
6 x 8	09201416	15	21,20	16,53	Plastic reel	27	200
6 x 8	09201427	25	21,20	16,82	Plastic reel	50	200
6 x 8	09201438	50	21,20	16,82	Plastic reel	50	200
6 x 8	09201449	100	21,20	16,82	Plastic reel	48	300
6 x 8	09201449	100	21,20	16,82	Plastic reel	48	300

Presentation: Shrink-wrapped

Measure Ø Nominal	Part Number	Length m	Minimum Breaking Load 1770 N/mm ²	Weight kg/100 m	Format of presentation
2 x 4	09201013	15	2,35	2,87	Shrink-wrapped
3 x 5	09201115	15	5,29	5,12	Shrink-wrapped
4 x 6	09201219	15	9,40	8,12	Shrink-wrapped
5 x 7	09201313	15	14,70	11,80	Shrink-wrapped
6 x 8	09201417	15	21,20	16,53	Shrink-wrapped