

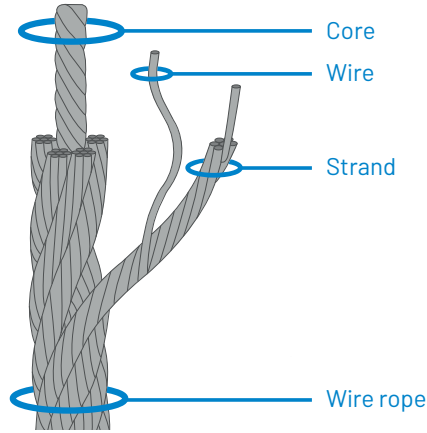


Galvanized steel wire rope - 7 x 19 + 0

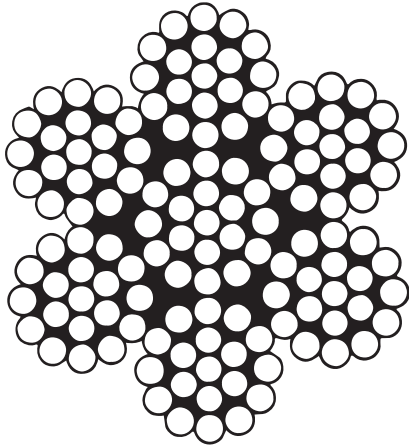

Galvanized steel wire rope 7 x 19 + 0 (6 x 19 WSC) is a mechanical element manufactured to maintain a balance between hardness, strength, abrasion, crushing, fatigue and corrosion. The technology used to manufacture steel wire rope is in constant development. Its main characteristics are the wires that make it up, the way they are arranged, how the strands are formed and how they are wound around the core. Thanks to their resistance, strength, durability, thickness and flexibility, steel wire ropes are used in countless applications and locations. UNIQ steel wire rope combines reliability, safety and high performance.




CORE: Metallic
LAY: Regular lay
FINISH: Galvanized
USES: Static cable, Agriculture, Livestock, Winch, Sling cable

Certification UNE-EN 12385-4.

Presentation: Reel

Measure Ø Nominal	Part Number	Length m	Minimum Breaking Load 1770 N/mm ²	Weight kg/100 m	Format of presentation	Reel dimensions	
						Ø Inside mm	Ø Outside mm
3	09205011	15	5,77	3,48	Plastic reel	48	114
3	09205022	25	5,77	3,48	Plastic reel	48	114
3	09205033	50	5,77	3,48	Plastic reel	48	133
3	09205044	100	5,77	3,48	Plastic reel	50	200
4	09205116	15	10,30	6,24	Plastic reel	50	200
4	09205127	25	10,30	6,24	Plastic reel	50	200
4	09205138	50	10,30	6,24	Plastic reel	50	200
4	09205149	100	10,30	6,24	Plastic reel	50	200
5	09205211	15	16,00	9,60	Plastic reel	50	200
5	09205222	25	16,00	9,60	Plastic reel	50	200
5	09205233	50	16,00	9,60	Plastic reel	50	200
5	09205244	100	16,00	9,60	Plastic reel	50	200
6	09205316	15	23,10	13,93	Plastic reel	50	200
6	09205327	25	23,10	13,93	Plastic reel	50	200
6	09205338	50	23,10	13,93	Plastic reel	50	200
6	09205349	100	23,10	13,93	Wooden reel	48	250




Galvanized steel wire rope - 7 x 19 + 0

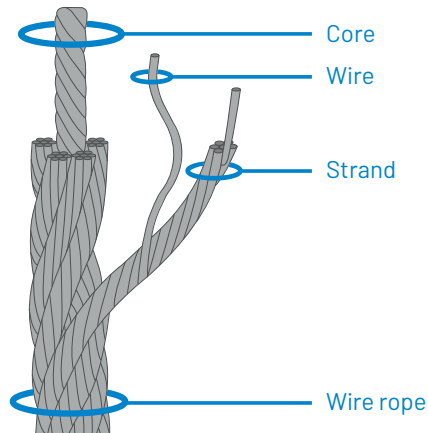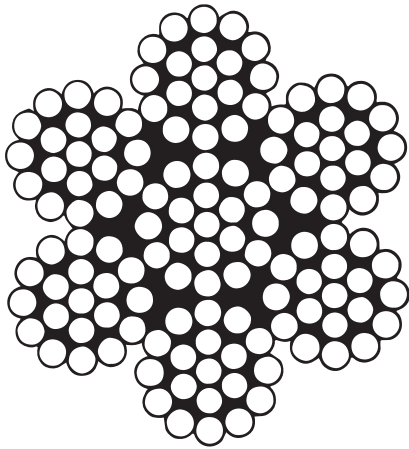

Presentation: Reel

Measure Ø Nominal	Part Number	Length m	Minimum Breaking Load 1770 N/mm ²	Weight kg/100 m	Format of presentation	Reel dimensions	
						Ø Inside mm	Ø Outside mm
7	09205411	15	31,40	18,93	Plastic reel	50	200
7	09205422	25	31,40	18,93	Plastic reel	50	200
7	09205433	50	31,40	18,93	Plastic reel	50	200
7	09205444	100	31,40	18,93	Wooden reel	48	250
8	09205516	15	41,00	24,60	Plastic reel	50	200
8	09205527	25	41,00	24,60	Plastic reel	50	200
8	09205538	50	41,00	24,60	Wooden reel	48	250
8	09205549	100	41,00	24,60	Wooden reel	48	250
10	09205616	15	64,10	38,40	Plastic reel	50	200
10	09205627	25	64,10	38,40	Plastic reel	50	200
10	09205638	50	64,10	38,40	Wooden reel	48	250
10	09205649	100	64,10	38,40	Wooden reel	48	300
12	09205816	15	92,30	55,40	Plastic reel	50	200
12	09205827	25	92,30	55,40	Wooden reel	48	250
12	09205838	50	92,30	55,40	Wooden reel	48	250
12	09205849	100	92,30	55,40	Wooden reel	48	250
14	09206016	15	126,00	75,33	Wooden reel	48	250
14	09206027	25	126,00	75,33	Wooden reel	48	250
14	09206038	50	126,00	75,33	Wooden reel	48	250
14	09206049	100	126,00	75,33	Wooden reel	48	450
16	09206216	15	164,00	98,67	Wooden reel	48	250
16	09206227	25	164,00	98,67	Wooden reel	48	250
16	09206238	50	164,00	98,67	Wooden reel	48	400
16	09206249	100	164,00	98,67	Wooden reel	48	500

Galvanized steel wire rope - 7 x 19 + 0

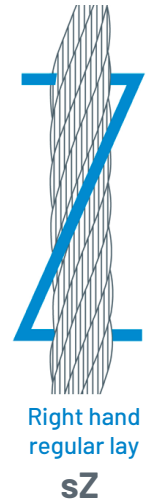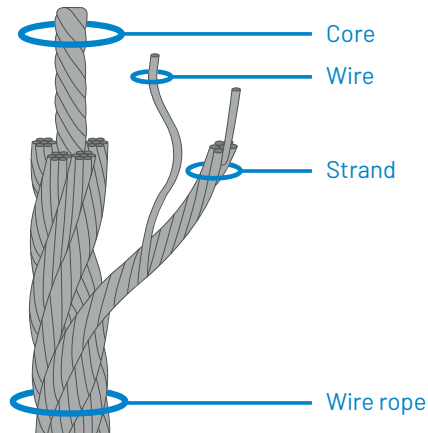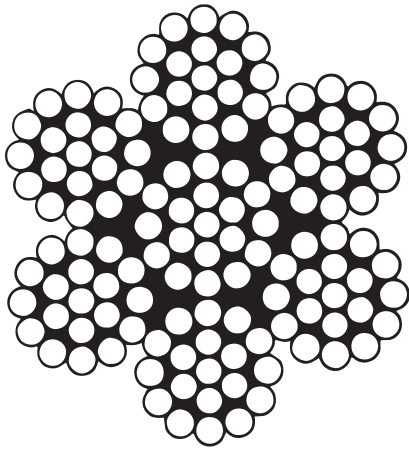

Presentation: Shrink-wrapped

Measure Ø Nominal	Part Number	Length m	Minimum Breaking Load 1770 N/mm ²	Weight kg/100 m	Format of presentation
3	09205012	15	5,77	3,48	Shrink-wrapped
4	09205117	15	10,30	6,24	Shrink-wrapped
5	09205212	15	16,00	9,60	Shrink-wrapped
6	09205317	15	23,10	13,93	Shrink-wrapped
8	09205517	15	41,00	24,60	Shrink-wrapped
10	09205617	15	64,10	38,40	Shrink-wrapped