



LASHING AND LIFTING SYSTEMS

Slings and
lashing systems



FLAT SLING

Available loads:
from 1,000 kg to 10,000 kg

Lengths:
from 1 m to 12 m

Bandwidths:
from 30 mm to 300 mm

Standard:
EN 1492-1



ROUND SLING

Available loads:
from 1,000 kg to 10,000 kg

Lengths:
from 2 m to 10 m

Bandwidths:
from 45 mm to 110 mm

Standard:
EN 1492-2




ROUND SLING WITH LOOPS

Available loads:
from 1,000 kg to 10,000 kg

Lengths:
from 1 m to 10 m

Bandwidths:
from 45 mm to 110 mm

Standard:
EN 1492-2

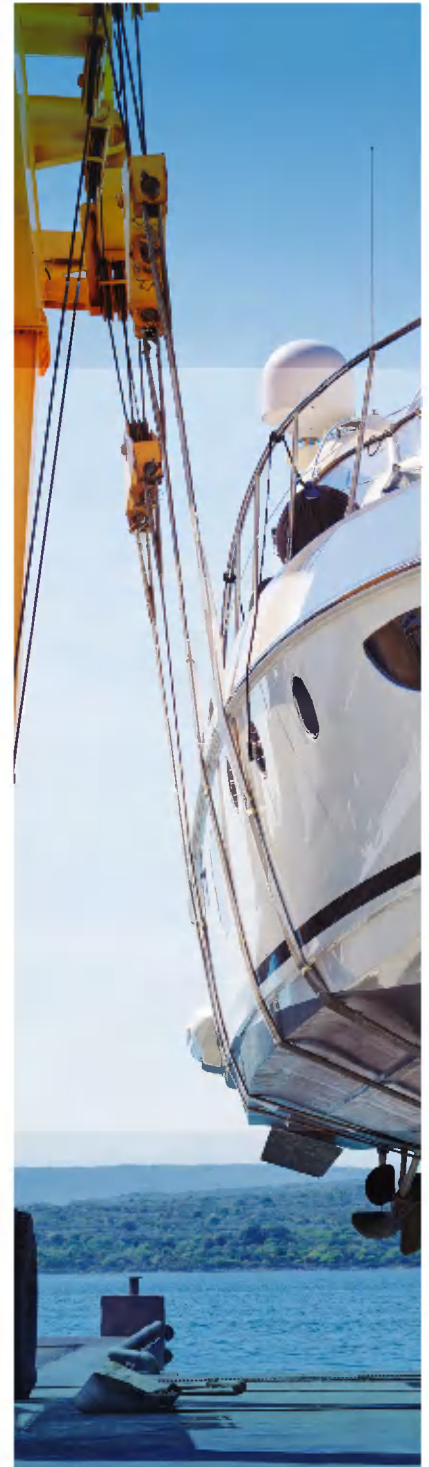

COLOUR GUIDE

1,000 kg	2,500 kg	5,000 kg
1,500 kg	3,000 kg	6,000 kg
2,000 kg	4,000 kg	8,000 kg
		10,000 kg

DIRECT SHOT



x1

DOUBLE SHOT



x2

STRANGLER




x0,8

ANGLE FROM 0° TO 45°



x1,4

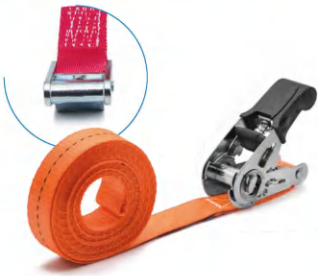

**Cambuckle strap
LIGHTWEIGHT**

Buckle **250 kg / 450 kg**
Tensor **800 kg**
Bandwidths: 25 or 35 mm
Lengths: up to 5 m



**Cambuckle strap
HEAVY LOAD**

2,000 kg / 4,000 kg
Bandwidths: 35 or 50 mm
Lengths: 6 or 8 m



TWO-PART HEAVY-DUTY ratchet set

800 kg
Bandwidth: 25 mm
Length: 5 m



TWO-PART HEAVY-DUTY ratchet set

2,000 kg
Bandwidth: 35 mm
Length: 6 m



TWO-PART HEAVY-DUTY ratchet set

4,000 kg
Bandwidth: 50 mm
Length: 9 m



TWO-PART HEAVY-DUTY ratchet set

5,000 kg
Bandwidth: 50 mm
Lengths: 9 or 10 m



TWO-PART HEAVY-DUTY ratchet set

10,000 kg
Bandwidth: 75 mm
Length: 8 m



**Interior lashing strap
FOR TRUCKS**

2,000 kg
Bandwidth: 50 mm
Length: 4 m



HEAVY-DUTY lashing ratchet and strap

4,000 kg
Bandwidth: 50 mm
Length: up to 20 m
Lashing and ratchet strap:
Sold separately



REVERSE HANDLE PULLING SYSTEM "CONFORT"

4,000 kg
Bandwidth: 50 mm
Length: 9 m



CAR TRANSPORT system

4,000 kg
Bandwidth: 50 mm
Length: 2.5 m



RATCHET STRAP

Up to 6,000 kg
Available Bandwidths:
25, 35 and 50 mm
Available lengths:
100 m and 1,000 m



BUCKLE for ratchet set

Breaking load: 250 and 900 kg
Useful widths available:
25 and 35 mm



HEAVY-DUTY ratchet

800 kg / 2,000 kg / 5,000 kg
Useful widths available:
25, 35 and 50 mm



CLOSED HOOK for ratchet strap

800 kg / 2,000 kg / 5,000 kg
Useful widths available:
25, 35 and 50 mm



OPEN HOOK for ratchet strap

2,000 kg / 5,000 kg
Useful widths available:
35 and 50 mm



damesa 
www.damesa.com

Scan the QR code to
access full information
about all Uniq articles.